

# PWR - SYNTHETIC WEB SLING- Ratings (Type I & II)




**TYPE 1** - Sling is made with a triangle fitting on end and slotted triangle choker on the other end. It can be used in a Vertical, Choker or Basket hitch.


## Type 1 and 2 - Single Ply Ratings lbs/(kgs) - (SWL) 5 to 1

Width Inches	Stock Code	Type	Vertical	Choker	Basket
1" (25mm)	811	1 or 2	Not Available		
2" (51mm)	812	1 or 2	3,200 (1,450)	2,400 (1,080)	6,400 (2,900)
3" (76mm)	813	1 or 2	4,800 (2,170)	3,800 (1,720)	9,600 (4,340)
4" (95mm)	814	1 or 2	6,400 (2,900)	5,100 (2,300)	12,800 (5,800)
5 (127mm)	815	1 or 2	8,000 (3,630)	6,000 (2,720)	16,000 (7,260)
6 (153mm)	816	1 or 2	9,600 (4,350)	7,200 (3,265)	19,200 (8,710)
8 (203mm)	818	1 or 2	12,500 (5,670)	9,500 (4,310)	25,000 (11,340)
10 (254mm)	8110	1 or 2	16,000 (7,200)	12,000 (5,440)	32,000 (14,400)
12 (305mm)	8112	1 or 2	19,200 (8,710)	14,400 (6,350)	38,400 (17,420)

**Note:** Ratings (SWL) are 1/5 of the Breaking Strength (Safety Factor of 5 to 1)

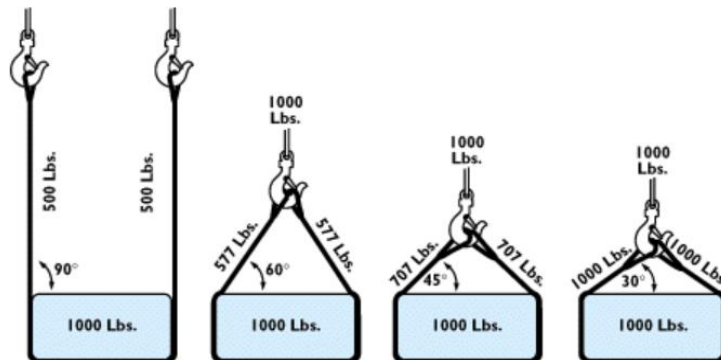

## PWR - SYNTHETIC WEB SLING- Ratings (Type I & II)



TYPE 2 - Sling is made with a triangle fitting on each end. It can be used in a Vertical or Basket lift only.

### Type 1 and 2 Double Ply Ratings lbs/(kgs) - (SWL) 5 to 1

Width Inches	Stock Code	Type	Vertical	Choker	Basket
1" (25mm)	821	1 or 2	Not Available		
2" (51mm)	822	1 or 2	4,500 (2,040)	3,800 (1720)	9,000 (4,080)
3" (76mm)	823	1 or 2	8,400 (3,800)	6,700 (3,000)	16,800 (7,600)
4" (95mm)	824	1 or 2	11,000 (4,990)	8,800 (3,990)	22,000 (9,980)
5 (127mm)	825	1 or 2	13,500 (6,100)	10,800 (4,900)	27,000 (12,200)
6 (153mm)	826	1 or 2	16,000 (7,200)	12,000 (5,440)	32,000 (14,400)
8 (203mm)	828	1 or 2	20,000 (9,050)	15,000 (6,800)	40,000 (18,100)
10 (254mm)	8218	1 or 2	23,000 (10,400)	17,000 (7,700)	46,000 (20,800)
12 (305mm)	8212	1 or 2	26,000 (11,800)	19,000 (8,600)	52,000 (23,600)

**Note:** Ratings (SWL) are 1/5 of the Breaking Strength (Safety Factor of 5 to 1)

