


PWR - SYNTHETIC WEB SLING- Ratings (Type V)




TYPE 5 - Endless sling, sometimes referred to as a grommet sling. It is a continuous loop formed by joining the ends of the fabric together with a load bearing splice. Sling length is measured from pull to pull (1/2 the circumference).


Type 5 - Single Ply Ratings lbs/(kgs) - (SWL) 5 to 1

Width Inches	Stock Code	Type	Vertical	Choker	Basket
1" (25mm)	811	5	3,100 (1400)	2,450 (1,100)	6,200 (2,800)
2" (51mm)	812	5	6,000 (2,700)	4,800 (2,175)	12,000 (5,400)
3" (76mm)	813	5	9,400 (4,200)	7,500 (3,400)	18,800 (8,400)
4" (95mm)	814	5	10,000 (4,500)	8,000 (3,600)	20,000 (9,000)
5 (127mm)	815	5	14,000 (6,360)	11,000 (4,900)	28,000 (12,720)
6 (153mm)	816	5	18,000 (8,180)	14,000 (6,360)	36,000 (16,360)
8 (203mm)	818	5	25,000 (11,340)	19,000 (8,620)	50,000 (22,675)
10 (254mm)	8110	5	30,000 (13,600)	23,000 (10,400)	60,000 (27,200)
12 (305mm)	8112	5	35,000 (15,880)	27,000 (12,250)	70,000 (31,760)

Note: Ratings (SWL) are 1/5 of the Breaking Strength (Safety Factor of 5 to 1)

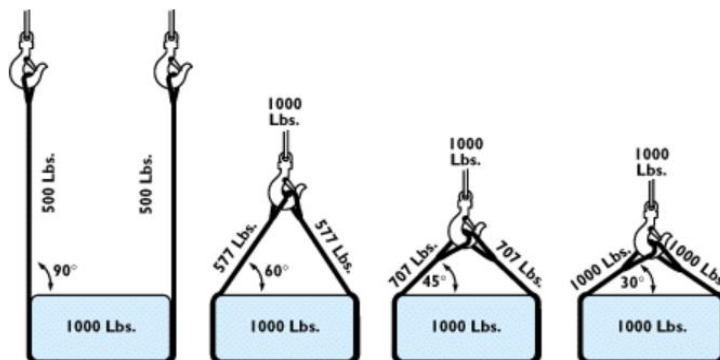

PWR - SYNTHETIC WEB SLING- Ratings (Type V)



Type 5 Double Ply Ratings lbs/(kgs) - (SWL) 5 to1

Width Inches	Stock Code	Type	Vertical	Choker	Basket
1" (25mm)	821	5	6,000 (2,700)	4,800 (2,150)	12,000 (5,440)
2" (51mm)	822	5	12,000 (5,440)	9,600 (4,350)	24,000 (10,880)
3" (76mm)	823	5	17,600 (8,000)	14,000 (6,300)	35,200 (16,000)
4" (95mm)	824	5	22,000 (10,000)	17,000 (7,700)	44,000 (20,000)
5 (127mm)	825	5	27,000 (12,270)	21,000 (9,540)	54,000 (24,540)
6 (153mm)	826	5	32,000 (14,540)	25,000 (11,360)	64,000 (29,090)
8 (203mm)	828	5	40,000 (18,150)	30,000 (13,600)	80,000 (36,300)
10 (254mm)	8210	5	50,000 (22,680)	38,000 (17,200)	100,000 (45,360)
12 (305mm)	8212	5	60,000 (27,200)	46,000 (20,810)	120,000 (54,400)

Note: Ratings (SWL) are 1/5 of the Breaking Strength (Safety Factor of 5 to1)

