


PWR - GR100 ALLOY CHAIN



- Meets or exceeds many national and international standards
- 25% higher working load limit when compared to Grade 80
- Environmentally friendly gray coating for distinct appearance, ease of identification
- Certification included with every drum
- 100% proof tested

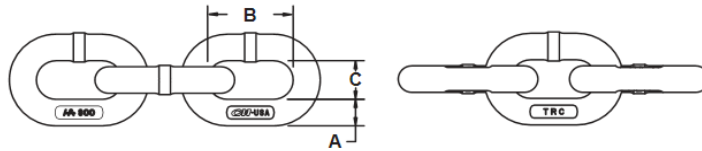

| Chain Size | Working Load Limit | Chain Part # | Nominal Chain Dimensions | | | Approx. Weight | Approx. No. Of Links | Drum | | |
|-----------------|--------------------|--------------|--------------------------|-------|-------|----------------|----------------------|--------|--------|---------------|
| | | | A | B | C | | | Part # | Length | Approx Weight |
| Imperial | | | | | | | | | | |
| in. | lb. | | in. | in. | in. | lb./ft. | per ft. | | ft. | lb. |
| 7/32 | 2,700 | 607321 | 0.218 | 0.676 | 0.312 | 0.44 | 17.8 | 677310 | 800 | 354 |
| 9/32 | 4,300 | 607328 | 0.281 | 0.883 | 0.395 | 0.73 | 13.6 | 677311 | 500 | 365 |
| 3/8 | 8,800 | 607339 | 0.394 | 1.247 | 0.574 | 1.44 | 9.6 | 677313 | 500 | 720 |
| 1/2 | 15,000 | 607351 | 0.512 | 1.559 | 0.734 | 2.46 | 7.7 | 677315 | 300 | 738 |
| 5/8 | 22,600 | 607363 | 0.630 | 1.916 | 0.855 | 3.70 | 6.3 | 677316 | 200 | 740 |
| 3/4 | 35,300 | 607378 | 0.787 | 2.397 | 1.070 | 5.80 | 5.0 | 677317 | 100 | 577 |



How to Select and Order the Proper Chain Sling

1. Determine the weight and configuration of the load(s) to be lifted.
2. Determine the type of chain sling required, according to weight and configuration.
3. Determine the size of the body chain according to the working load limits. Be sure to take into consideration the effect of the required angle. The working load limit is the maximum load in pounds which should ever be applied in direct tension to a straight length of chain.
4. Determine the reach required to give the desired angle. The reach is measured from the upper bearing surface of the master link to the bearing surface of the lower attachment. If chain slings are to be used in pairs and are to be matched for reach, please indicate when ordering.

